



EKOTEKS
LABORATUVAR VE GÖZETİM HİZMETLERİ A.Ş.

**EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.**
Esenyurt Firuzköy Bulvarı No:29 34325 Avcılar
İstanbul/ TÜRKİYE

TEST REPORT
DENEY RAPORU



AB-0583-T
22005852
03-22

Customer name: FLOKSER TEKSTİL SAN VE TİC. A.Ş.
Address: HADIMKÖY MAH. ÜRGÜPLÜ CAD. NO:7 ARNAVUTKÖY/İSTANBUL
Buyer name: -
Contact Person: HAKAN GÜNERİ
Order No: 32012.22.07.TR.01
Article No: NİLE (FR) 901 SİYAH
Name and identity of test item: One sample of black panel
The date of receipt of test item: 01.03.2022
Date of test: 01.03.2022-07.03.2022
Remarks: -
Sampling: The results given in this report belong to the received sample by vendor.
End-Use:
Care Label: -
Number of pages of the report: 12

The Turkish Accreditation Agency (TURKAK) is signatory to the multilateral agreements of the European co-operation for the Accreditation (EA) and of the International Laboratory Accreditation (ILAC) for the Mutual recognition of test reports.

EKOTEKS LABORATUVAR ve GÖZETİM HİZMETLERİ A.Ş. accredited by TÜRKAK under registration number [AB-0583-T] for ISO 17025:2017 as test laboratory.

The test and/or measurement results, the uncertainties (if applicable) with confidence probability and test methods are given on the following pages which are part of this report.



Seal

Date
07.03.2022

Customer Representative
Zahide TAPAN

Head of Testing Laboratory
Sevim A. RAZAK
07.03.2022

This report shall not be reproduced other than in full except with the permission of the laboratory.
Testing reports without signature and seal are not valid.

EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.

AB-0583-T

22005852

03-22

REQUIRED TESTS	EVALUATION	COMMENTS
PHYSICAL PROPERTIES TESTS		
Flammability/ BS 5852: Part 1- Smouldering Cigarette Test ⁽¹⁾	P	
Flammability/ BS 5852: Part 1-Match Flame Test ⁽²⁾	P	
Flammability/ BS EN 1021-1- Smouldering Cigarette Test ⁽³⁾	P	
Flammability/ BS EN 1021-2:2014 -Match Flame Test ⁽⁴⁾	P	
P:Pass F:Fail R: Refer to retailer technologist. ⁽¹⁾ Test results were evaluated according to BS 5852: Part 1- Smouldering Cigarette Test limit values ⁽²⁾ Test results were evaluated according to BS 5852: Part 1-Match Flame Test limit values ⁽³⁾ Test results were evaluated according to BS EN 1021-1- Smouldering Cigarette Test limit values ⁽⁴⁾ Test results were evaluated according to BS EN 1021-2:2014 -Match Flame Test limit values		

REMARK: Original samples are kept for 3 months and all technical records are kept for 5 years unless otherwise specified.If requested, measurement uncertainty will be reported. But unless otherwise specified, measurement uncertainty is not considered while stating compliance with specification or limit values The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95 %. The declaration of conformity was given in accordance with the Simple Acceptance Decision Rule. Tests marked (*) in this report are not included in the accreditation schedule



This report shall not be reproduced other than in full except with the permission of the laboratory.
Testing reports without signature and seal are not valid.

AB-0583-T

22005852

03-22

TEST RESULTS

FLAMMABILITY; BS 5852: Part 1: 1979 – Smouldering Cigarette Test

Conditioning

Prior to testing: The sample was conditioned before the test for at least 16 hours in an atmosphere having a temperature of 20 ± 5 °C and a relative humidity of 50 ± 20 %

Test Condition : The sample was tested in an atmosphere with a temperature of 15°C to 30°C and relative humidity of 20% to 70 %.

Cover Fabric Specification (Standart test fabric as detailed in Schedule 1 Part 1 Of The Furniture and Furnishings (Fire)(Safety) Regulations 1988)

Fabric weight : 220 ± 5 g/m²

Fabric Construction : Plain Weave woven fabric

Fabric Type : 100% Polyester Flame retardant fabric

Ignition Source : Source 0 – Test cigarette complying to standard

“The following test results relate only to the ignitability of the combination of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use.”

AB-0583-T

22005852

03-22

TEST RESULTS

Criteria Of Failure	Test 1	Test 2
Progressive smouldering failure		
Progressive smouldering of the interior and/or cover is observed at any time within a period of 1 hour of the placement of the cigarette	NO	NO
Flaming Failure		
Any flaming of the interior and/or cover is observed at any time within a period of 1 hour of the placement of the cigarette	NO	NO
On final examination whether progressive smouldering should be observed when dismantle assembly and examine internally	NO	NO
RESULT	PASS	

O : Observed

NO : Not observed

Test Details

	Test 1	Test 2
Smoking ceased time (after placement of the cigarette) (min:sec)	05:21	04:02
Flame ceased time (min:sec)	-	-
Progressive smouldering time (min:sec)	-	-
Melting	NO	NO
Dripping	NO	NO
Charring	O	O

“The sample tested meets the requirements of Schedule 4 Part 1 (The cigarette test) of The Furniture and Furnishings (Fire) (Safety) Regulations 1988”

Total Uncertainty : $\pm 3,8$



AB-0583-T

22005852

03-22

TEST RESULTS

FLAMMABILITY; BS 5852: Part 1: 1979 – Match Flame Test

Conditioning

Prior to testing: The sample was conditioned before the test for at least 16 hours in an atmosphere having a temperature of 20 ± 5 °C and a relative humidity of 50 ± 20 %

Test Condition : The sample was tested in an atmosphere with a temperature of 15°C to 30°C and relative humidity of 20% to 70 %.

Cover Fabric Specification (Standart test fabric as detailed in Schedule 1 Part 1 Of The Furniture and Furnishings (Fire)(Safety) Regulations 1988)

Fabric weight : 220 ± 5 g/m²
Fabric Construction : Plain Weave woven fabric
Fabric Type : 100% Polyester Flame retardant fabric

Ignition Source : Source 1 – Butane gas Flowing at 45 ml/min @ 25 °C

Flame Height : 35 mm

Flame Application Time : 20 ± 1 seconds

“The following test results relate only to the ignitability of the combination of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use.”

EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.

AB-0583-T

22005852

03-22

TEST RESULTS

Criteria Of Failure	Test 1	Test 2
Progressive smouldering failure		
Any progressive smouldering of the interior and/or cover after 120 seconds of the removal of the burner tube	NO	NO
Flaming Failure		
Any flaming of the interior and/or cover after 120 seconds of the removal of the burner tube	NO	NO
On final examination whether progressive smouldering is observed when dismantle assembly and examine internally	NO	NO
RESULT	PASS	

O : Observed


NO : Not observed

Test Details

	Test 1	Test 2
Duration of flaming (after removal of the burner) (min:sec)	6 sn	4 sn
Duration of progressive smouldering time (min:sec)	-	-

“The sample tested meets the requirements of Schedule 5 Part 1 (The match test) of The Furniture and Furnishings (Fire) (Safety) Regulations 1988”

Total Uncertainty : $\pm\%3,0$

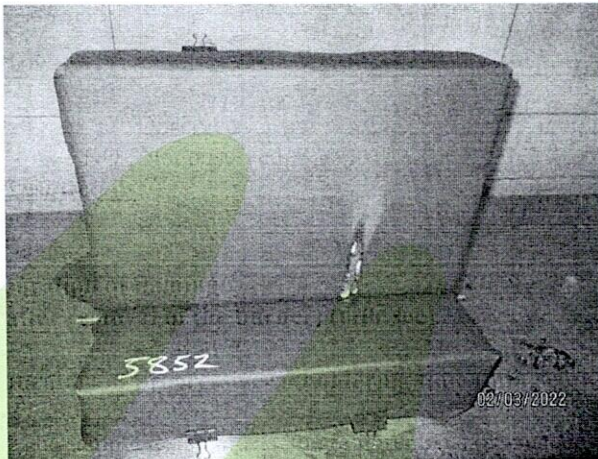

AB-0583-T

22005852

03-22

TEST RESULTS

FLAMMABILITY; BS EN 1021-1:2014 - Smouldering Cigarette Test

The sample has not been treated with a fire-retardant chemical. Therefore original sample was tested

Conditioning

Prior to testing: All samples and cigarettes were conditioned before the test for at least 24 hours in an atmosphere having a temperature of 23 ± 2 °C and a relative humidity of 50 ± 5 %

Test Condition : The sample was tested in an atmosphere with a temperature of 15°C to 30°C and relative humidity of 15% to 80 %.

Filling Specification

Filling Type : Non fire retardant polyurethane foam
Size : 450 x 300 x 75 mm (back) & 450 x 150 x 75 mm (seat)
Density / Hardness : 22 kg/m³
Type B, 130 N

Specimen size : 800 x 650 mm (length x width)

Ignition Source : Test cigarette complying to standard

“The following test results relate only to the ignitability of the combination of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use.”

**EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.**

AB-0583-T

22005852

03-22

TEST RESULTS

Criteria Of Failure	Test 1	Test 2
Progressive smouldering failure		
Any test assembly that display escalating combustion behaviour so that it is unsafe to continue the test and active extinction is necessary	NO	NO
Any test assembly that smoulders until it is largely consumed within the test duration	NO	NO
Any test assembly that smoulders to the extremities of the specimen , viz. upper or lower margins, either side or to its full thickness, within the duration of the test	NO	NO
Any test assembly that smoulders after one hour from the beginning of the test	NO	NO
Any test assembly that, on final examination, shows evidence of active smouldering	NO	NO
Flaming failure		
Any flaming of the interior and/or cover is observed at any time within a period of 1 hour of the placement of the cigarette	NO	NO
RESULT	PASS	

O : Observed

NO : Not Observed

NA : Not Applicable

Test Details

	Test 1	Test 2
Smoking ceased time (after placement of the cigarette) (min:sec)	04:55	04:38
Flame ceased time (min:sec)	-	-
Progressive smouldering time (min:sec)	-	-
Melting	NO	NO
Dripping	NO	NO
Charring	O	O

O : Observed

NO : Not Observed

“The fabric tested meets the requirements BS EN 1021-1:2014

Total Uncertainty : $\pm 0,9\%$

EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.

AB-0583-T

22005852

03-22



Gen.f136-2/03

AB-0583-T

22005852

03-22

TEST RESULTS

FLAMMABILITY; BS EN 1021-2:2014 -Match Flame Test

The sample has not been treated with a fire-retardant chemical. Therefore original sample was tested

Conditioning

Prior to testing: All samples and cigarettes were conditioned before the test for at least 24 hours in an atmosphere having a temperature of 23 ± 2 °C and a relative humidity of 50 ± 5 %

Test Condition : The sample was tested in an atmosphere with a temperature of 15°C to 30°C and relative humidity of 15% to 80 %.

Filling Specification

Filling Type : Non fire retardant polyurethane foam
Size : 450 x 300 x 75 mm (back) & 450 x 150 x 75 mm (seat)
Density / Hardness : 22 kg/m³
Type B, 130 N

Specimen size : 800 x 650 mm (length x width)

İgnition Source : Butane gas Flowing at 45 ml/min @ 25 ° C

Flame Height : 35 mm

Flame Application Time : 15±1 seconds

“The following test results relate only to the ignitability of the combination of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use.”

EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.

AB-0583-T

22005852

03-22

TEST RESULTS

Criteria Of Failure	Test 1	Test 2
Progressive smouldering failure		
Any test assembly that display escalating combustion behaviour so that it is unsafe to continue the test and active extinction is necessary	NO	NO
Any test assembly that smoulders until it is largely consumed within the test duration	NO	NO
Any test assembly that smoulders to the extremities of the specimen , viz. upper or lower margins, either side or to its full thickness, within the duration of the test	NO	NO
Any test assembly that smoulders after one hour from the beginning of the test	NO	NO
Any test assembly that, on final examination, shows evidence of active smouldering	NO	NO
Flaming failure		
Any test assembly that display escalating combustion behaviour so that it is unsafe to continue the test and active extinction is necessary	NO	NO
Any test assembly that burns until it essentially consumed within the test duration	NO	NO
Any test assembly on which any flame front reaches the lower margin, either side or passes through its full thickness within the duration of the test	NO	NO
Any flaming which continues for more than 120 s after removal of the burner tube	NO	NO
RESULT	PASS	

O : Observed

NO : Not Observed

NA : Not Applicable

Test Details

	Test 1	Test 2
Duration of flaming (after removal of the burner) (min:sec)	7 sn	-
Duration of progressive smouldering time (min:sec)	-	-

O : Observed

NO : Not Observed

“The fabric tested meets the requirements BS EN 1021-2:2014

Total Uncertainty : ±%8,3

**EKOTEKS LABORATUVAR ve GÖZETİM
HİZMETLERİ A.Ş.**

AB-0583-T

22005852

03-22



Gen.F136-2.03